

X VISION

PARKING SENSOR


AFTERMARKET PARKING SENSOR AS PART OF INTEGRATED INSTALLATION.

- SEDAN ✓ COUPE ✓ STATION WAGON ✓ LIMOUSINE ✓ MPV ✓
 4X4 ✓ CARAVAN ✓ PICK UP ✓ TRUCK ✓ BUS ✓ BUGGY ✓


SPECIFICATIONS

- Power Requirement** : DC10V - 25V
Max. Current Consumption : 200mA (with display)
 : 0.5mA (without display)
Operating Temperature : -20°C ~ 70°C
Storage Temperature : -30°C ~ 80°C
Transmitting Frequency : 40 kHz
System Response Time : 0.12sec
Buzzer Sound Pressure Level : 80 dB at 10cm
Specifications are subject to change without prior notice

X VISION REAR SENSOR HORIZONTAL SENSING DIAGRAM WITH BUZZER

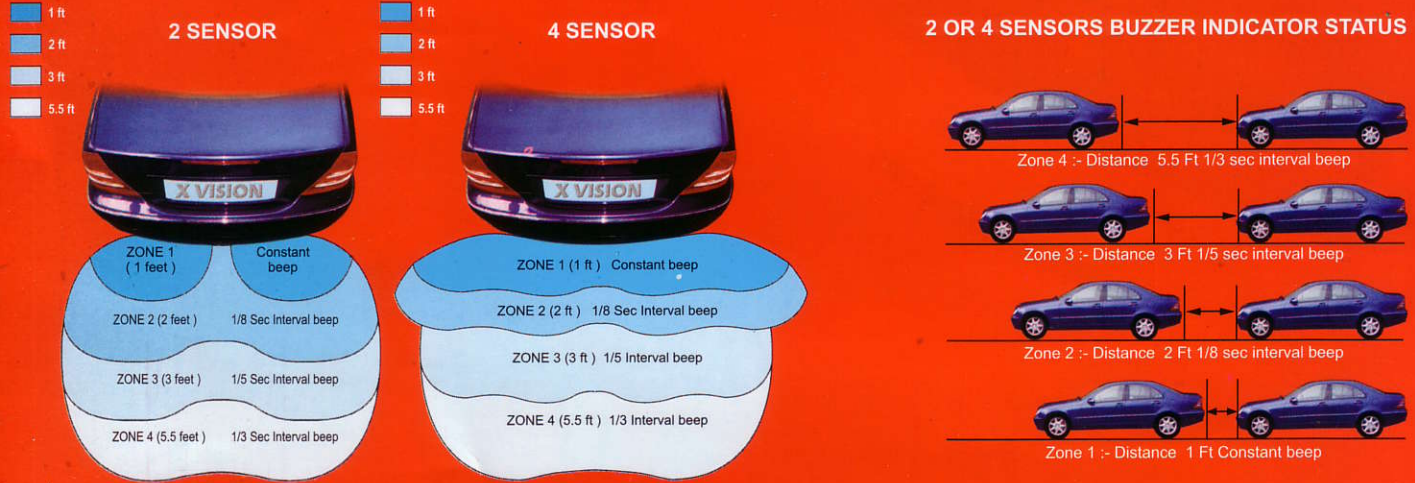

X VISION REAR SENSOR HORIZONTAL SENSING DIAGRAM

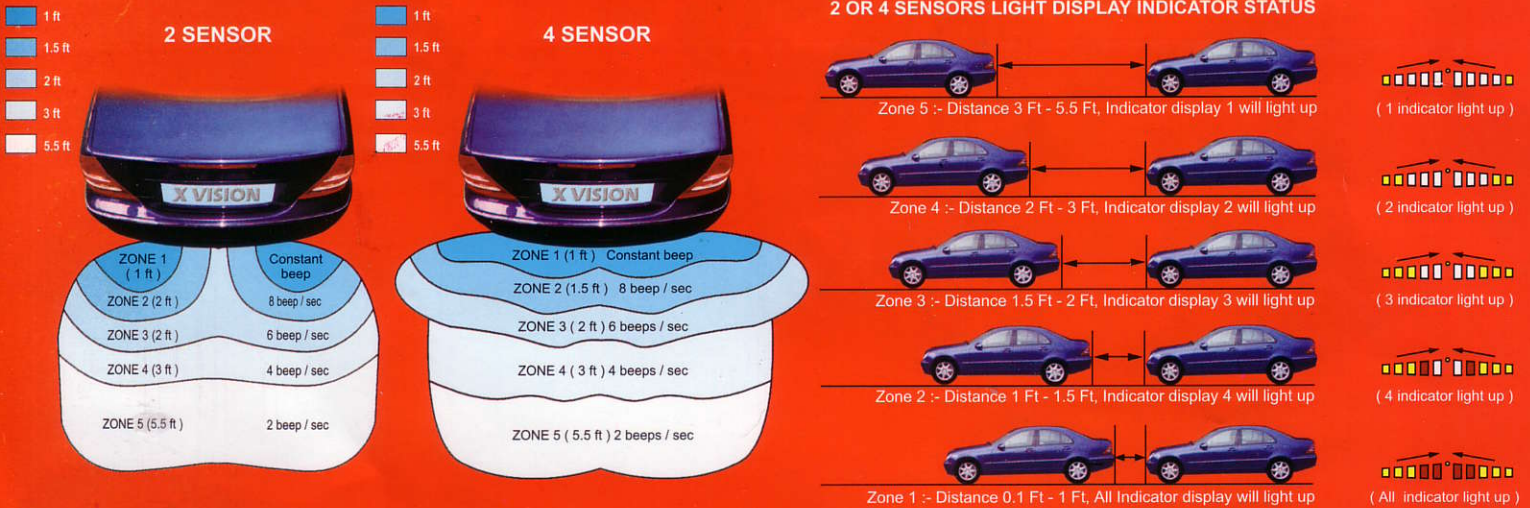

X VISION FRONT SENSOR HORIZONTAL SENSING DIAGRAM

